






Assembly Instruction For RTA Windsor Chair

A	2 pcs 50mm Hexagon Bolt	
B	6pcs Wooden Screw	
C	2pcs Barrel Nut	
D	2pcs Wood Plug	
E	1pcs Allen Key	

Insert stretcher into position shown in Figure 1.

Install the front stretcher insert barrel into holes on stretcher and assemble stretcher using hexagon bolts in line with barrel nut. (see Figure 2)

Do not tighten yet.

Place a piece of soft cloth at the corner of table (to protect both surfaces of chair seat and table top). Then position chair on table for support.

* RED MARK must face to front from the chair.

Position the leg assembly into the bottom of chair seat. Align and tighten bolt chair seat and legs using the wood screw. (see figure 3)

Insert Wood Plug to cover the hole.

CONGRATULATIONS!

(Please tighten all screw and bolts).

YOUR CHAIR IS NOW READY FOR USE.



Figure 1

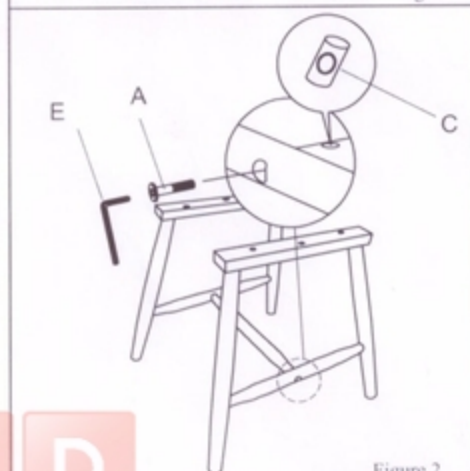


Figure 2



Figure 3

MUST TIGHTEN SCREW PERIODICALLY. WITH USE SCREW WILL BECOME LOOSE. CHECK TIGHTNESS OF ALL SCREW EVERY 6-8 WEEKS.

" This product was inspected before assembly, and we recommend that you inspect all elements before assembly and use the assembly instruction carefully and follow them correctly ensuring all fittings properly tightened. this will avoid accidents and ensure your products are satisfactory for their purpose."